


## UHZ45 Bright 4K UHD laser projector for business and home





- True 4K UHD resolution and laser technology HDR and HLG compatible
- Bright 3800 lumens with Lights On Viewing eARC/ARC and SPDIF Output with Dolby 5.1
- Low input lag 16.7ms response time in 4K at 60Hz and 4ms in 1080P at 240Hz
- Keystone Correction Four corner correction and 1.1x zoom

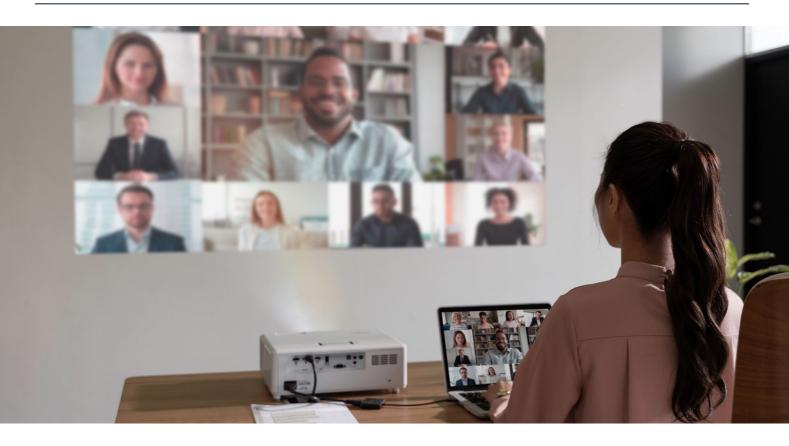

Experience all-round versatility. The stylish UHZ45 laser projector delivers 4K UHD resolution for incredibly crisp images with exceptional clarity and vibrancy for presentations, movies, TV shows, games, and sports. Take your gaming to the next level with enhanced gaming mode

for fast-moving action with a 16.7ms response time in 4K at 60Hz and 4ms in 1080P at 240Hz.

## **Specifications**

Specifications	
UPC: 796435 81 421 2, EAN: 50	55387665835. Colour: White
Display/image	
Display technology	DLPTM
Resolution	UHD (3840x2160)
Brightness	3,800 lumens
Contrast ratio	2,000,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction -	+/-30°
horizontal	
Keystone correction - vertical	+/-30°
Has vertical auto keystone	Yes
correction	
Displayable colors (millions)	1073.4
Horizontal scan rate	15.375 ~ 91.146 Khz
Vertical scan rate	50 ~ 120HzHz
Uniformity	75%
Screen size	33" ~ 300" diagonal
Lamp info	
Light source type	
LASER life	30,000 hours
Optical Throw ratio	1.5:1 ~ 1.66:1
Projection distance	1.5:1 ~ 1.66:1 47.24" - 389.76"
Projection distance Zoom	47.24" - 389.76" 1.1
Zoom type Focal length (mm)	Manual 15.84mm~17.44mm
Focal length (mm) Lens shift	15.84mm~17.44mm Vertical: +/-0%
Lens snift Native offset	vertical: +/-0% 105%
Connectivity	10070
Connectivity	
	Inputs 3 x HDMI 2.0, 1 x USB-A Outputs 1 x Audio 3.5mm, 1 x S/PDIF
	Control 1 x RS232, 1 x 12V trigger, 1 x 3D sync
	Sound FATIO202, FAT2V mggdi, FAOD Sync
General	07.15
	27dB
Noise level (max)	29dB
Noise level (max) PC compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
Noise level (max) PC compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz
Noise level (max) PC compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,
Noise level (max) PC compatibility 2D compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz
Noise level (max) PC compatibility 2D compatibility 3D compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 4801/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 4801/p, 5761/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H//M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese,
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80%
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4,4MHz 480/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power supply Power consumption (standby)	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit 100V ~ 240V, 50-60Hz <0.5W
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box Input lag Optional wireless models Power Power supply Power consumption (standby) Power consumption (min)	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit 100V ~ 240V, 50-60Hz <0.5W 175W
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box Input lag Optional wireless models <b>Power</b> Power ver Power consumption (standby) Power consumption (min) Power consumption (max)	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit 100V ~ 240V, 50-60Hz <0.5W
Noise level (max) PC compatibility 2D compatibility 3D compatibility 3D Security OSD / display languages 24/7 operation Operating conditions Remote control Heat dissipation Speaker count Watts per speaker In the box Input lag Optional wireless models <b>Power</b> Power consumption (standby) Power consumption (min) Power consumption (max)	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H///M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576/p, 720p(50/60Hz), 1080l(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit 100V ~ 240V, 50-60Hz <0.5W 175W
Noise level (typical) Noise level (max) PC compatibility 2D compatibility 3D compatibility	29dB UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz) TBC 3D ready Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish, Chinese (traditional) Yes 0°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 80% Backlit home remote 785BTU/hour 2 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.00ms UHDCast Pro, QuickCast Bundle, QuickCast starter kit 100V ~ 240V, 50-60Hz <0.5W 175W 230W







Copyright © 2023 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments<sup>TM</sup>. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 23062023071950